

Data Sheet

GB-Series with pressure-fit flange SSI

Magnetostrictive Linear Position Sensors

- High pressure resistant sensor rod
- High operating temperature up to +100 °C (+212 °F)
- Flat & compact ideal for the valve market



Data Sheet

MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

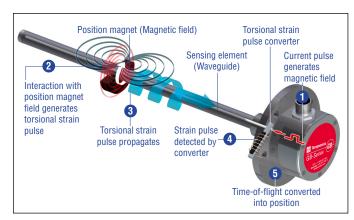


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

GB SENSOR

Robust, non-contact and wear free – the Temposonics linear position sensors provide best durability and accurate position measurement solutions in harsh industrial environments. The high quality of the in-house manufactured waveguide forms the basis for precise measurements. The position magnet is mounted on the moving machine part and travels non-contact over the sensor rod with the built-in waveguide.

Temposonics® GB is a rod-style sensor for installation into hydraulic cylinders, e.g. in power engineering. With its flat and compact sensor housing and side-mounted signal connection, the sensor is ideal for small spaces. Due to the pressure-resistant sensor rod and its high operating temperature the Temposonics® GB sensor is perfectly suitable for use in fluid technology. For improved signal quality the sensor automatically adapts to the strength of the magnet used in the application.

The set points, start and end position of the measurement, can be modified after installation of the Temposonics® GB sensor.

Programming can be carried out using the standard connection cable.

TECHNICAL DATA

Output				
Interface	SSI (Synchronous Serial Interface) – Differential signal in SSI standard			
Data format	Binary, gray			
Data length	832 bit			
Programming	Programming of set points using optional accessories			
Measured value	Position			
Measurement parameters				
Resolution	5 μm minimum			
Cycle time	Up to 3.7 kHz depending on stroke length			
Linearity 1	\leq ±0.02 % F.S. (minimum ±60 µm) typical			
Repeatability	≤ ±0.005 % F.S. (minimum ±20 µm) typical			
Operating conditions				
Operating temperature	-40+90 °C (-40+194 °F), Options: -40+75 °C (-40+167 °F)/ -40+100 °C (-40+212 °F)			
Ingress protection	IP67 (correctly fitted); IP68 (for cable outlet)			
Shock test	100 g (single shock) IEC standard 60068-2-27			
Vibration test	15 g/102000 Hz IEC standard 60068-2-6 (excluding resonant frequencies)			
EMC test	Electromagnetic emission according to EN 61000-6-4 Electromagnetic immunity according to EN 61000-6-2 The sensor meets the requirements of the EU directives and is marked with C €			
Operating pressure	350 bar (5,076 psi), 700 bar (10,153 psi) peak (at 10 × 1 min), GB-J: 800 bar (11,603 psi)			
Magnet movement velocity	Any			
Design/Material				
Sensor electronics housing ² with flange	GB-J/GB-K/GB-S: Stainless steel 1.4305 (AISI 303), GB-N: Stainless steel 1.4404 (AISI 316L)			
Sensor rod	GB-J: Stainless steel 1.4301 (AISI 304), GB-K/GB-S: Stainless steel 1.4306; 1.4307 (AISI 304L), GB-N: Stainless steel 1.4404 (AISI 316L)			
Stroke length	253250 mm (1128 in.)			
Mechanical mounting				
Mounting position	Any			
Mounting instruction	Please consult the technical drawings and the operation manual (document number: <u>551631</u>)			
Electrical connection				
Connection type	M12 A-coded male connector (8 pin), M16 male connector (7 pin), cable outlet			
Operating voltage	+24 VDC (-15/+20 %)			
Ripple	≤ 0.28 V _{pp}			
Current consumption	90 mA typical			
Dielectric strength	500 VDC (DC ground to machine ground)			
Polarity protection	Up to -30 VDC			
Overvoltage protection	Up to 36 VDC			

^{1/} With position magnet # 251 416-2

^{2/} For option \fbox{H} (-40...+100 °C/-40...+212 °F) an aluminum cover plate is used

TECHNICAL DRAWING

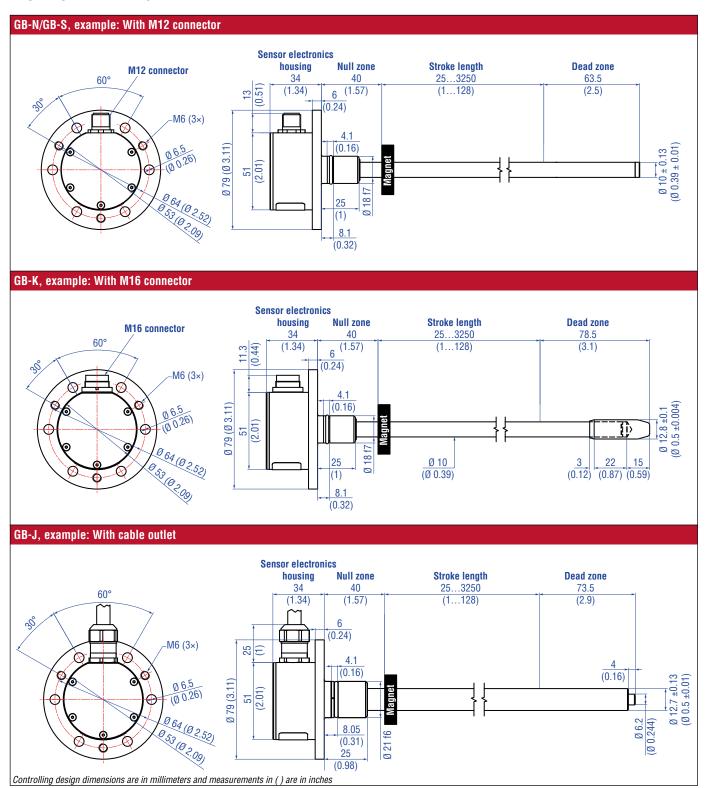


Fig. 2: Temposonics @ GB-N/GB-S/GB-K/GB-J with ring magnet

CONNECTOR WIRING

D84			
Signal + power supply			
M12 male connector (A-coded)	Pin	Function	
	1	Clock (+)	
	2	Clock (-)	
	3	Data (+)	
	4	Data (-)	
	5	Not connected	
View on sensor	6	Not connected	
	7	+24 VDC (-15/+20 %)	
	8	DC Ground (0 V)	

Fig. 3: Connector wiring D84 (M12 connector)

D70		
Signal + power supply		
M16 male connector	Color	Function
	1	Data (-)
	2	Data (+)
(9 O)	3	Clock (+)
	4	Clock (-)
	5	+24 VDC (-15/+20 %)
View on sensor	6	DC Ground (0 V)
	7	Not connected

Fig. 4: Connector wiring D70 (M16 connector)



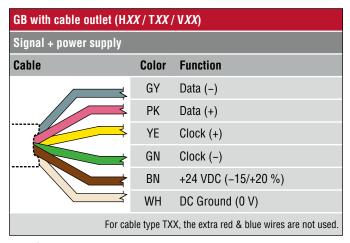



Fig. 5: Connector wiring (cable outlet)


FREQUENTLY ORDERED ACCESSORIES – Additional options available in our Accessories Guide 551444











Ring magnet OD33 Part no. 201 542-2

Material: PA ferrite GF20 Weight: Approx. 14 g Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)

Ø 4.5 (Ø 0.18)

Ring magnet OD25.4 Part no. 400 533

Material: PA ferrite Weight: Approx. 10 g Surface pressure: Max. 40 N/mm² Operating temperature: -40...+105 °C (-40...+221 °F)

U-magnet OD33 Part no. 251 416-2

Ø 17

(Ø 0.67

Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F)

Ring magnet Part no. 402 316

Material: PA ferrite coated Weight: Approx. 13 g Surface pressure: Max. 20 N/mm² Operating temperature: -40...+100 °C (-40...+212 °F)

Position magnet

Ø 63.5

(Ø 2.5)


Ø 42 (Ø 1.65)

Ø 16

(Ø 0.63)

O-rings


95



Back-up ring

Ø2

(0.07)



U-magnet OD63.5 Part no. 201 553

Material: PA 66-GF30. magnets compound-filled Weight: Approx. 26 a Surface pressure: 20 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)

O-ring for pressure fit flange Ø 18 mm Part no. 560 853

Material: Fluoroelastomer Durometer: 75 Shore A Operating temperature:

O-ring for pressure fit flange Ø 21 mm Part no. 561 438

Material: FKM Durometer: 75 Shore A


Magnet spacer


Back-up ring for pressure fit flange Ø 18 mm Part no. 561 115


Material: PTFE + 60 % bronze

Back-up ring

Optional installation hardware







Back-up ring for pressure fit flange Ø 21 mm Part no. 561 439

Material: PTFE

Fixing clip Part no. 561 481

Application: Used to secure sensor rods (Ø 10 mm (Ø 0.39 in.)) when using an U-magnet or block magnet Material: Brass, non-magnetic


Magnet spacer Part no. 400 633

Material: Aluminum Weight: Approx. 5 g

Surface pressure: Max. 20 N/mm² Fastening torque for M4 screws: 1 Nm


Controlling design dimensions are in millimeters and measurements in () are in inches

Cable connectors*



M12 A-coded female connector (8 pin), straight Part no. 370 694


Housing: GD-ZnAL
Termination: Screw
Contact insert: CuZn
Cable Ø: 4...9 mm (0.16...0.35 in.)
Wire: 0.75 mm²
Operating temperature:
-25...+90 °C (-13...+194 °F)
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.6 Nm



M12 A-coded female connector (8 pin), angled Part no. 370 699


Housing: GD-ZnAL

Termination: Screw
Contact insert: CuZn
Cable Ø: 6...8 mm (0.24...0.31 in.)
Wire: 0.5 mm²
Operating temperature:
-25...+85 °C (-13...+185 °F)
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.6 Nm



M16 female connector (7 pin), straight Part no. 370 624

Material: Zinc nickel plated
Termination: Solder
Contact insert: Silver plated
Cable clamp: PG9
Cable Ø: 6...8 mm (0.24...0.31 in.)
Operating temperature:
-40...+100 °C (-40...+212 °F)
Ingress protection: IP65/IP67
(correctly fitted)
Fastening torque: 0.7 Nm



M16 female connector (7 pin), angled Part no. 560 779

Material: Zinc nickel plated
Termination: Solder
Contact insert: Silver plated
Cable Ø: 6...8 mm (0.24...0.31 in.)
Wire: 0.75 mm² (20 AWG)
Operating temperature:
-40...+95 °C (-40...+203 °F)
Ingress protection: IP67 (correctly fitted)
Fastening torque: 0.5 Nm

Cables

PUR cable Part no. 530 052

Material: PUR jacket; orange Features: Twisted pair, shielded, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant Cable Ø: 6.4 mm (0.25 in.) Cross section: $3 \times 2 \times 0.25$ mm² Bending radius: $5 \times D$ (fixed installation) Operating temperature: -30...+80 °C (-22...+176 °F)



PTFE cable Part no. 530 112

Material: PTFE jacket; black
Features: Twisted pair, shielded, flexible,
high thermal resistance, mostly oil &
acid resistant
Cable Ø: 7.6 mm (0.3 in.)
Cross section: 4 × 2 × 0.25 mm²
Bending radius: 8 – 10 × D
(fixed installation)
Operating temperature:
-100...+180 °C (-148...+356 °F)



Silicone cable Part no. 530 113

Material: Silicone jacket; red
Features: Twisted pair, shielded, highly
flexible, halogen free, high thermical
resistance
Cable Ø: 7.2 mm (0.28 in.)
Cross section: 3 × 2 × 0.25 mm²
Bending radius: 5 × D
(fixed installation)
Operating temperature:
-50...+180 °C (-58...+356 °F)





Programming kit Part no. 254 590

Kit includes:

- 1 × interface converter box,
- 1 × power supply
- 1 × cable (60 cm) with M12 female connector (8 pin), straight – D-sub female connector (9 pin), straight
- 1 × cable (60 cm) with M16 female connector (7 pin), straight – D-sub female connector (9 pin), straight
- 1 × cable (60 cm) with 6 × terminal clamp – D-sub female connector (9 pin), straight
- 1 × USB cable

Software is available at: www.temposonics.com

^{*/} Follow the manufacturer's mounting instructions

ORDER CODE

1 2	_ 3	4 5 6 7 8	9 10 11	12	_13	20	21
G B				1	S		C
a	b	C	d	е	f	g	h

a | Sensor model

G B Rod

b Design

- Housing material stainless steel 1.4305 (AISI 303), rod material stainless steel 1.4301 (AISI 304)

 Pressure fit flange Ø 21 mm, Ø 12.7 mm rod, 800 bar
- K Housing material stainless steel 1.4305 (AISI 303), rod material stainless steel 1.4306; 1.4307 (AISI 304L)

 Pressure fit flange Ø 18 mm, Ø 10 mm rod with bushing on rod end
- N Housing material stainless steel 1.4404 (AISI 316L), rod material stainless steel 1.4404 (AISI 316L)³
 Pressure fit flange Ø 18 mm, Ø 10 mm rod
- S Housing material stainless steel 1.4305 (AISI 303), rod material stainless steel 1.4306; 1.4307 (AISI 304L)

 Pressure fit flange Ø 18 mm, Ø 10 mm rod

c Stroke length

X X X X M 0025...3250 mm

Standard stroke length (mm)	Ordering steps	
25 500 mm	5 mm	
500 750 mm	10 mm	
7501000 mm	25 mm	
10002500 mm	50 mm	
25003250 mm	100 mm	

	χ	χ	Х	χ	U	001.0128.0 in
ı	^			- ^		001.0120.01

Standard stroke length (in.)	Ordering steps	
1 20 in.	0.2 in.	
20 30 in.	0.4 in.	
30 40 in.	1.0 in.	
40100 in.	2.0 in.	
100128 in.	4.0 in.	

Non-standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments.

d Connection type

- D 8 4 M12 connector (8 pin)
- **D 7 0** M16 connector (7 pin)
- H X PUR cable (part no. 530 052)
 (suitable for max. operating temperature of +80 °C (+176 °F))

H01...H10 (1...10 m/3...33 ft.)

See "Frequently ordered accessories" for cable

See "Frequently ordered accessories" for cable specifications

d | Connection type (continued)

- T X X PTFE cable (part no. 530 112) T01...T10 (1...10 m/3...33 ft.)

 See "Frequently ordered accessories" for cable specifications
- **V X** Silicone cable (part no. 530 113) V01...V10 (1...10 m/3...33 ft.)

See "Frequently ordered accessories" for cable specifications

Encode in meters if using metric stroke length. Encode in feet if using US customary stroke length

e Operating voltage

1 +24 VDC (-15/+20 %)

f Output

S (14) (15) (16) (17) (18) (19) = Synchronous Serial Interface

Data length (box no. 14)

- 1 25 bit
- **2** 24 bit

Output format (box no. 15)

- **B** Binary
- **G** Gray

Resolution (box no. 16)

- **1** 0.005 mm (5 μm)
- 2 0.01 mm (10 µm)
- **3** 0.05 mm (50 μm)
- **4** 0.1 mm (100 μm)
- **5** 0.02 mm (20 μm)

Filtering performance (box no. 17)

- 1 No filter
- 2 Average filter 2
- 3 Average filter 4
- 4 Average filter 8

Signal options (box no. 18, 19)

- 0 0 Measuring direction forward, asynchronised measurement
- **0 1** Measuring direction reverse, asynchronised measurement
- **0 2** Measuring direction forward, synchronised measurement
- **0 3** Measuring direction reverse, synchronised measurement
- g See next page

Operating temperature

H -40...+100 °C (-40...+212 °F)

S -40...+90 °C (-40...+194 °F)

L -40...+75 °C (-40...+167 °F)

h Programming

C Via cable

DELIVERY



• 0-ring

· Back-up ring

Accessories have to be ordered separately.

Manuals, Software & 3D Models available at: www.temposonics.com



UNITED STATES 3001 Sheldon Drive

Temposonics, LLC Cary, N.C. 27513

Americas & APAC Region Phone: +1 919 677-0100

E-mail: info.us@temposonics.com

GERMANY Auf dem Schüffel 9 Temposonics 58513 Lüdenscheid GmbH & Co. KG Phone: +49 2351 9587-0

ITALY Phone: +39 030 988 3819

Branch Office E-mail: info.it@temposonics.com

FRANCE Phone: +33 6 14 060 728

Branch Office E-mail: info.fr@temposonics.com

UK Phone: +44 79 21 83 05 86

Branch Office E-mail: info.uk@temposonics.com

SCANDINAVIA Phone: +46 70 29 91 281

Branch Office E-mail: info.sca@temposonics.com

CHINA Phone: +86 21 2415 1000 / 2415 1001

Branch Office E-mail: info.cn@temposonics.com

JAPAN Phone: +81 3 6416 1063

Branch Office E-mail: info.jp@temposonics.com

Document Part No. 551630 Revision E (EN) 02/2022







