


## Data Sheet

### EP / EL SSI

#### Magnetostrictive Linear Position Sensors

- For standard applications
- Operating temperature up to +75 °C (+167 °F)
- Ideal for limited installation space

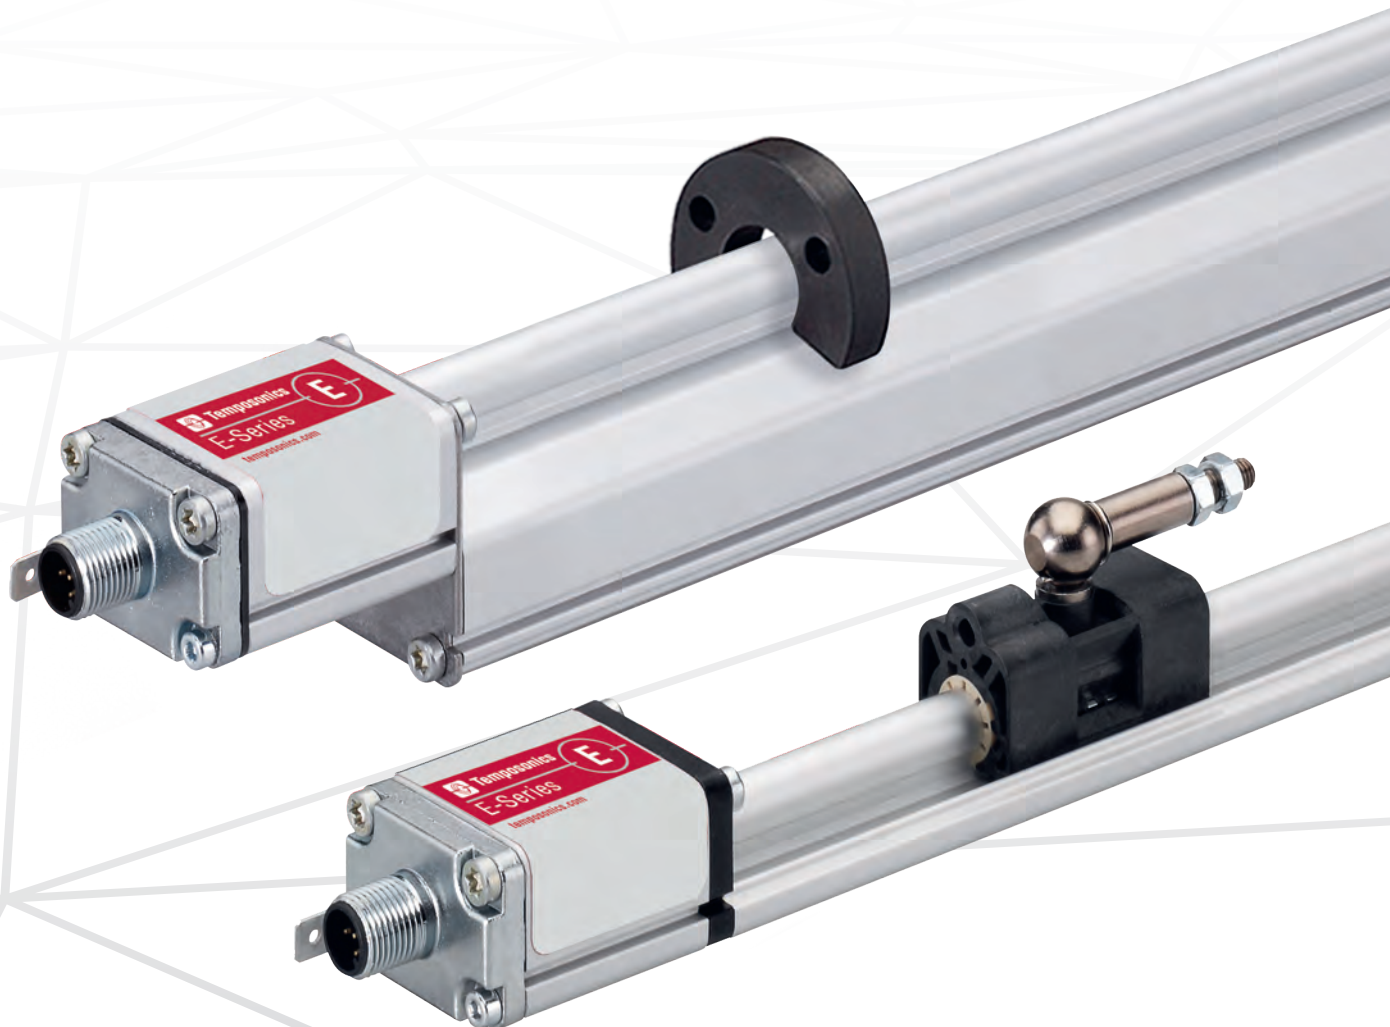

MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

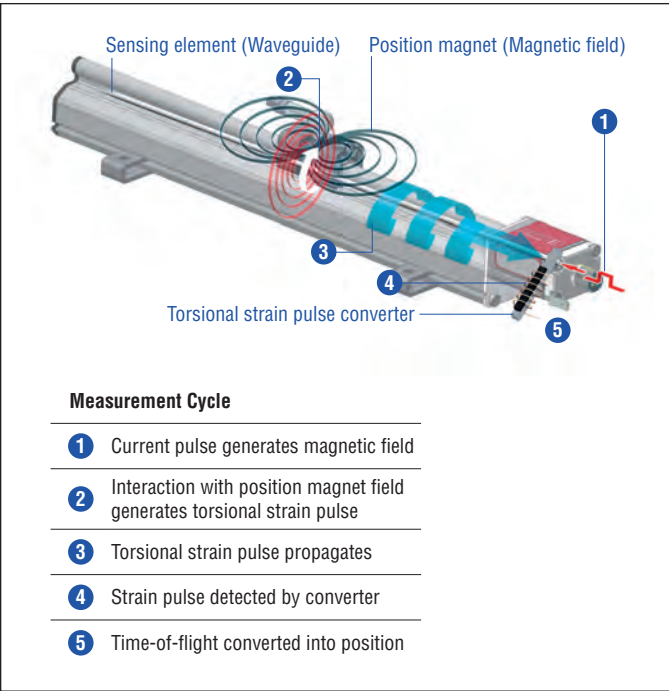


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

EP / EL SENSOR

Robust, non-contact and wear free, the Temposonics linear position sensors provide the best durability and precise position measurement feedback in harsh industrial environments. Measurement accuracy is tightly controlled by the quality of the waveguide manufactured exclusively by Temposonics.

The compact Temposonics® EP as well as the ultra low Temposonics® EL are profile sensors suitable for standard applications and in particularly for applications with limited installation space. The evaluation electronics is accomodated in an aluminum sensor housing. Typical fields of applications are plastics industry, metal forming and wood-working as well as factory automation.

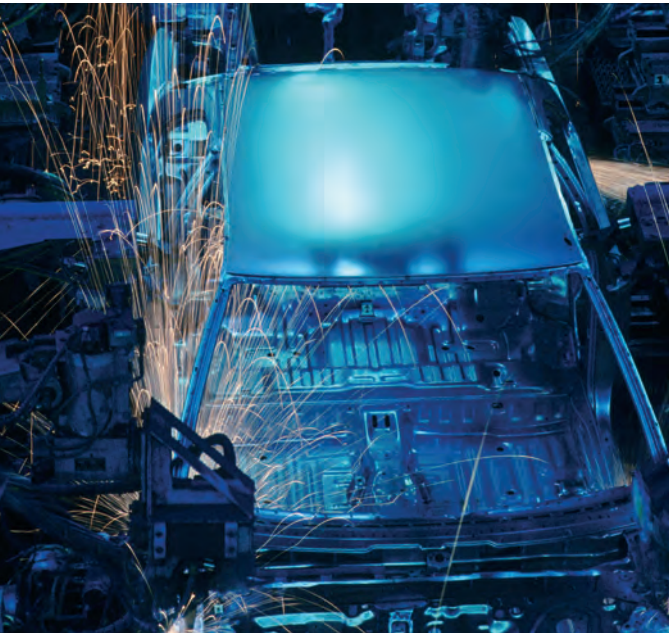



Fig. 2: Typical application: Factory automation

## TECHNICAL DATA

Output					
Interface	SSI (Synchronous Serial Interface)				
Data format	Binary or gray				
Data length	24, 25 bit				
Data transmission rate	70 kBaud*...1 MBaud, dependent on cable length:				
	Cable length	< 3 m	< 50 m	< 100 m	< 200 m < 400 m
	Baud rate	1.0 MBd	< 400 kBd	< 300 kBd	< 200 kBd < 100 kBd
Measured value	Position				
Measurement parameters					
Resolution	20 µm, 50 µm or 100 µm				
Cycle time	Stroke length	300 mm	750 mm	1000 mm	2000 mm
	Measurement rate	3.7 kHz	3.0 kHz	2.3 kHz	1.2 kHz
Linearity <sup>1</sup>	Magnet slider: ≤ ±0.02 % F.S. (minimum ±60 µm), U-magnet: ≤ ±0.02 % F.S. (minimum ±60 µm), block magnet: ≤ ±0.03 % (minimum ±90 µm)				
Repeatability	≤ ±0.005 % F.S. (minimum ±20 µm)				
Operating conditions					
Operating temperature	−40...+75 °C (−40...+167 °F)				
Humidity	90 % rel. humidity, no condensation				
Ingress protection <sup>2,3</sup>	IP67 (if mating connectors are correctly fitted)				
Shock test	100 g (single shock) IEC standard 60068-2-27				
Vibration test	15 g / 10...2000 Hz IEC standard 60068-2-6 (resonance frequencies excluded)				
EMC test	Electromagnetic emission according to EN 61000-6-3				
	Electromagnetic immunity according to EN 61000-6-2				
	The sensor meets the requirements of the EC directives and is marked with 				
Magnet movement velocity	Magnet slider: ≤ 5 m/s; U-magnet: Any; block magnet: Any				
Design / Material					
Sensor electronics housing	Aluminum				
Sensor profile	Aluminum				
Stroke length	50...2540 mm (2...100 in.)				
Mechanical mounting					
Mounting position	Any				
Mounting instruction	Please consult the technical drawings and the brief instructions (document number: <a href="#">551684</a> )				
Electrical connection					
Connection type	M12 (8 pin) male connector				
Operating voltage	+24 VDC (−15 / +20 %); UL recognition requires an approved power supply with energy limitation (UL 61010-1), or Class 2 rating according to the National Electrical Code (USA) / Canadian Electrical Code.				
Ripple	≤ 0.28 V <sub>pp</sub>				
Current consumption	Typ. 90 mA				
Dielectric strength	500 VDC (DC ground to machine ground)				
Polarity protection	Up to −30 VDC				
Overvoltage protection	Up to 36 VDC				


\*/With standard one shot of 16 µs

1/ Magnet slider # 252 182 and # 252 184, U-magnet # 251 416-2 and block magnet # 403 448

2/ The IP rating is not part of the UL recognition

3/ The IP rating IP67 is only valid for the sensor electronics housing, as water and dust can get inside the profile

TECHNICAL DRAWING

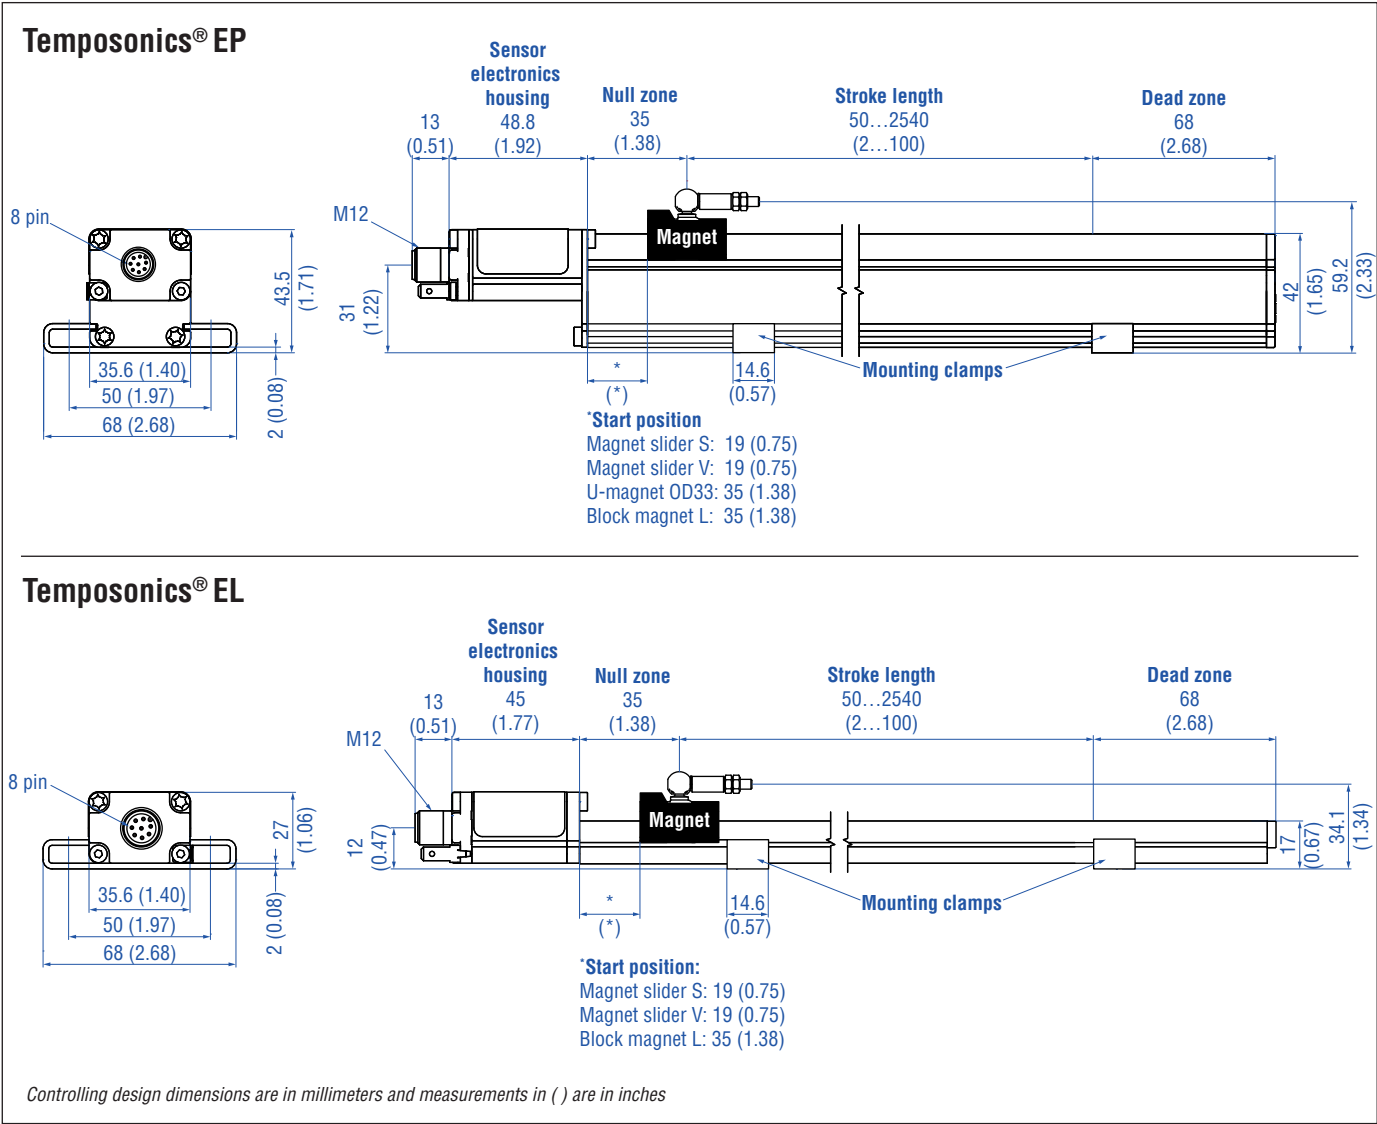

CONNECTOR WIRING

D84

M12 A-coded	Pin	Function
	1	Clock (+)
	2	Clock (-)
	3	Data (+)
	4	Data (-)
	5	Not connected
	6	Not connected
	7	+24 VDC (-15 / +20 %)
	8	DC Ground (0 V)

## FREQUENTLY ORDERED ACCESSORIES – Additional options available in our [Accessories Guide](#) 551444

### Position magnets


<b>Magnet slider S</b> Part no. 252 182	<b>Magnet slider V</b> Part no. 252 184	<b>U-magnet OD33</b> Part no. 251 416-2	<b>Block magnet L</b> Part no. 403 448
Material: GFK, magnet hard ferrite Weight: Ca. 35 g Operating temperature: –40...+75 °C (–40...+167 °F)	Material: GFK, magnet hard ferrite Weight: Ca. 35 g Operating temperature: –40...+75 °C (–40...+167 °F)	Only for: <b>EP</b> Material: PA ferrite GF20 Weight: Ca. 11 g Operating temperature: –40...+105 °C (–40...+221 °F) Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm	Material: Hard ferrite Weight: Ca. 20 g Operating temperature: –40...+75 °C (–40...+167 °F) Fastening torque for M4 screws: 1 Nm

### Cable connectors <sup>4</sup>

### Cord sets

<b>M12 (8 pin) female, straight</b> Part no. 370 694	<b>M12 (8 pin) female, angled</b> Part no. 370 699	<b>M12 (8 pin) female, straight</b> Part no. 370 674	<b>M12 (8 pin) female, angled</b> Part no. 370 676
Housing: GD-ZnAL / IP67 Termination: Screw; 0.75 mm² Contact insert: CuZn Operating temperature: –25...+90 °C (–13...+194 °F) Cable Ø: 4...9 mm (0.16...0.35 in.) Fastening torque: 0.6 Nm	Housing: GD-ZnAL / IP67 Termination: Screw; max. 0.5 mm² Contact insert: CuZn Operating temperature: –25...+85 °C (–13...+185 °F) Cable Ø: 6...8 mm (0.24...0.31 in.) Fastening torque: 0.6 Nm	Ingress protection: IP67 Cable: Shielded, pigtail end Cable length: 5 m (16.4 ft.)	Ingress protection: IP67 Cable: Shielded, pigtail end Cable length: 5 m (16.4 ft.)

### Mounting clamp

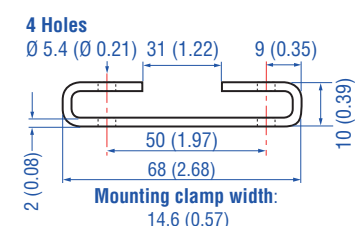

**Mounting clamp**  
Part no. 403 508

Material: Stainless steel 1.4301 / 1.4305  
(AISI 304 / 303)

<sup>4/</sup> Follow the manufacturer's mounting instructions

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

## ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
E		0						D	8	4	1	S				1	0	0
a		b						c			d					e		f

a	Sensor model
L	Ultra low profile
P	Compact profile

b	Design
0	Without position magnet

c	Stroke length
X X X X M	0050...2540 mm
X X X X U	002.0...100.0 in.

Standard stroke length (mm)\*

Stroke length	Ordering steps
50 ... 500 mm	25 mm
500...2540 mm	50 mm

Standard stroke length (in.)\*

Stroke length	Ordering steps
2 ... 20 in.	1.0 in.
20...100 in.	2.0 in.

d	Connection type
D 8 4	(M12) 8 pin male connector

e	Operating voltage
1	+24 VDC (-15 / +20 %)

f	Output
S	(14) (15) (16) (17) (18) (19) = Synchronous Serial Interface
	Data length (box no. 14)
1	25 bit
2	24 bit
	Output format (box no. 15)
B	Binary
G	Gray
	Resolution (box no. 16)
3	0.05 mm
4	0.1 mm
5	0.02 mm
	Performance (box no. 17)
1	Standard
	Signal option (box no. 18 and 19)
0 0	Measuring direction forward

\* / Non standard stroke lengths are available; must be encoded in 5 mm / 0.1 in. increments

## DELIVERY



- Sensor
- 2 mounting clamps up to 1250 mm (50 in.) stroke length  
+ 1 mounting clamp for each 500 mm (20 in.) additional stroke length

Accessories have to be ordered separately.

Manuals & Software available at:  
[www.temposonics.com](http://www.temposonics.com)



# Temposonics

AN AMPHENOL COMPANY

**UNITED STATES**  
**Temposonics, LLC**  
Americas & APAC Region  
3001 Sheldon Drive  
Cary, N.C. 27513  
Phone: +1 919 677-0100  
E-mail: [info.us@temposonics.com](mailto:info.us@temposonics.com)

---

**GERMANY**  
**Temposonics**  
**GmbH & Co. KG**  
EMEA Region & India  
Auf dem Schüffel 9  
58513 Lüdenscheid  
Phone: +49 2351 9587-0  
E-mail: [info.de@temposonics.com](mailto:info.de@temposonics.com)

---

**ITALY**  
Branch Office  
Phone: +39 030 988 3819  
E-mail: [info.it@temposonics.com](mailto:info.it@temposonics.com)

---

**FRANCE**  
Branch Office  
Phone: +33 6 14 060 728  
E-mail: [info.fr@temposonics.com](mailto:info.fr@temposonics.com)

---

**UK**  
Branch Office  
Phone: +44 79 44 15 03 00  
E-mail: [info.uk@temposonics.com](mailto:info.uk@temposonics.com)

---

**SCANDINAVIA**  
Branch Office  
Phone: +46 70 29 91 281  
E-mail: [info.sca@temposonics.com](mailto:info.sca@temposonics.com)

---

**CHINA**  
Branch Office  
Phone: +86 21 2415 1000 / 2415 1001  
E-mail: [info.cn@temposonics.com](mailto:info.cn@temposonics.com)

---

**JAPAN**  
Branch Office  
Phone: +81 3 6416 1063  
E-mail: [info.jp@temposonics.com](mailto:info.jp@temposonics.com)

---

**Document Part Number:**  
551306 Revision D (EN) 03/2018



## temposonics.com

© 2021 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at [www.temposonics.com/trademarkownership](http://www.temposonics.com/trademarkownership).