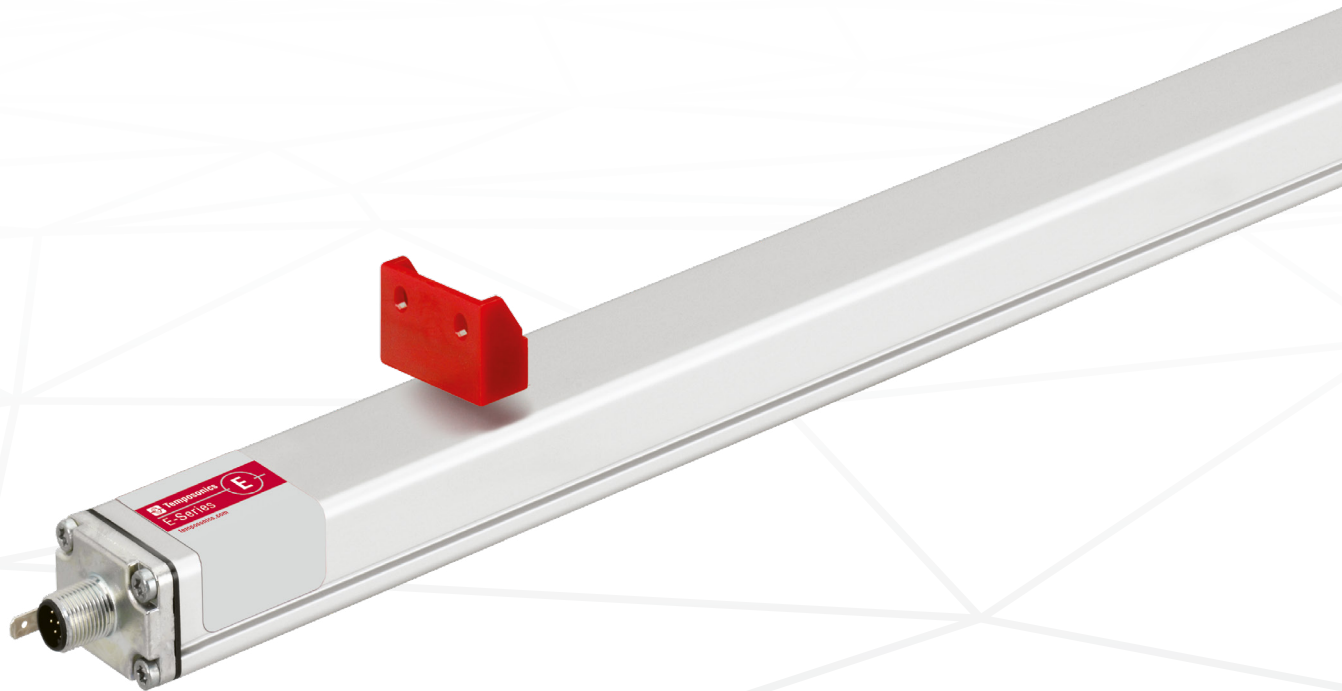


Data Sheet

EP2 CANopen

Magnetostrictive Linear Position Sensors

- Optimal price-/performance ratio
- Position measurement with more than one magnet
- Flat & compact



MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company’s proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

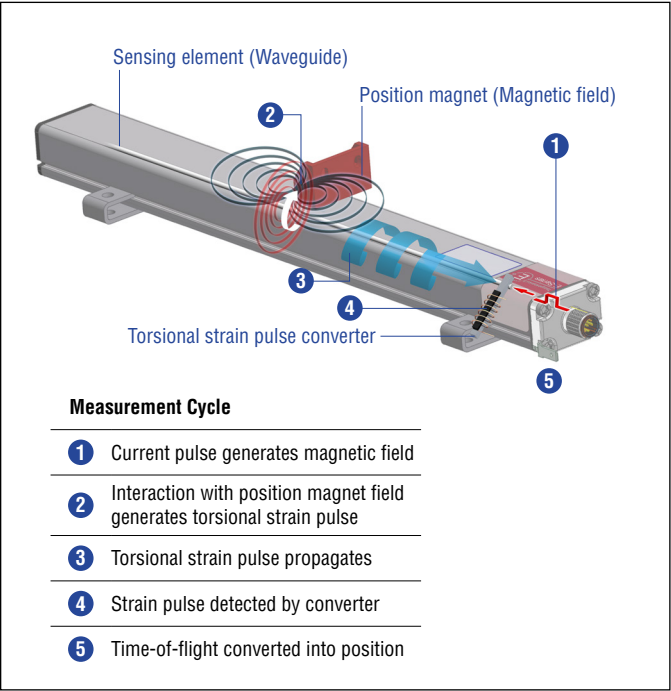


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

EP2 SENSOR


Robust, non-contact and wear free, the Temposonics® linear position sensor provide high durability and precise position measurement feedback in harsh industrial environments. Measurement accuracy is tightly controlled by the quality of the waveguide manufactured exclusively by Temposonics.

The compact and flat aluminum profile offers flexible mounting options and easy installation. Moreover, the position magnet can travel along the entire flat housing profile. The EP2 has an attractive price-/performance ratio and is ideal for industrial applications including plastics molding and processing, factory automation and packaging.



Fig. 2: Plastic granulate for injection molding or extrusion

TECHNICAL DATA

Output					
Interface	CAN System ISO-DIS 11898				
Data protocol	CANopen: CIA standard DS 301 V3.0/encoder profile DS 406 V3.1				
Baud rate, kBit/s	1000	800	500	250	125
Cable length, m	< 25	< 50	< 100	< 250	< 500
	The sensor will be supplied with ordered baud rate, changeable by customer via LSS				
Measured variable	Position, option: Multi-position measurement with a maximum of 2 magnets				
Measurement parameters					
Resolution	10 µm, 20 µm				
Cycle time	1 ms				
Linearity	≤ ±0.02 % F.S. (minimum ±90 µm)				
Repeatability	≤ ±0.005 % F.S. (minimum ±20 µm)				
Operating conditions					
Operating temperature	−40...+75 °C (−40...+167 °F)				
Humidity	90 % relative humidity, no condensation				
Ingress protection ^{1,2}	IP67 (if mating cable connector is correctly fitted)				
Shock test	100 g (single shock) IEC standard 60068-2-27				
Vibration test	8 g/10...2000 Hz IEC standard 60068-2-6 (resonance frequencies excluded)				
EMC test	Electromagnetic emission according to EN 61000-6-3 Electromagnetic immunity according to EN 61000-6-2 The sensor meets the requirements of the EC directives and is marked with 				
Magnet movement velocity	Any				
Design/Material					
Sensor lid	Zinc die-cast				
Sensor profile	Aluminum				
Stroke length	50...2540 mm (2...100 in.)				
Mechanical mounting					
Mounting position	Any				
Mounting instruction	Please consult the technical drawings and the brief instructions (document number: 551684)				
Electrical connection					
Connection type	M12 (5 pin) male connector				
Operating voltage	+24 VDC (−15/+20 %); UL recognition requires an approved power supply with energy limitation (UL 61010-1), or Class 2 rating according to the National Electrical Code (USA)/Canadian Electrical Code				
Ripple	≤ 0.28 V _{PP}				
Current consumption	40...60 mA depending on stroke length				
Dielectric strength	500 VDC (DC ground to machine ground)				
Polarity protection	Up to −30 VDC				
Overvoltage protection	Up to 36 VDC				

1/ The IP rating is not part of the UL recognition

2/ The IP rating IP67 is only valid for the sensors electronics housing, as water and dust can get inside the profile

TECHNICAL DRAWING

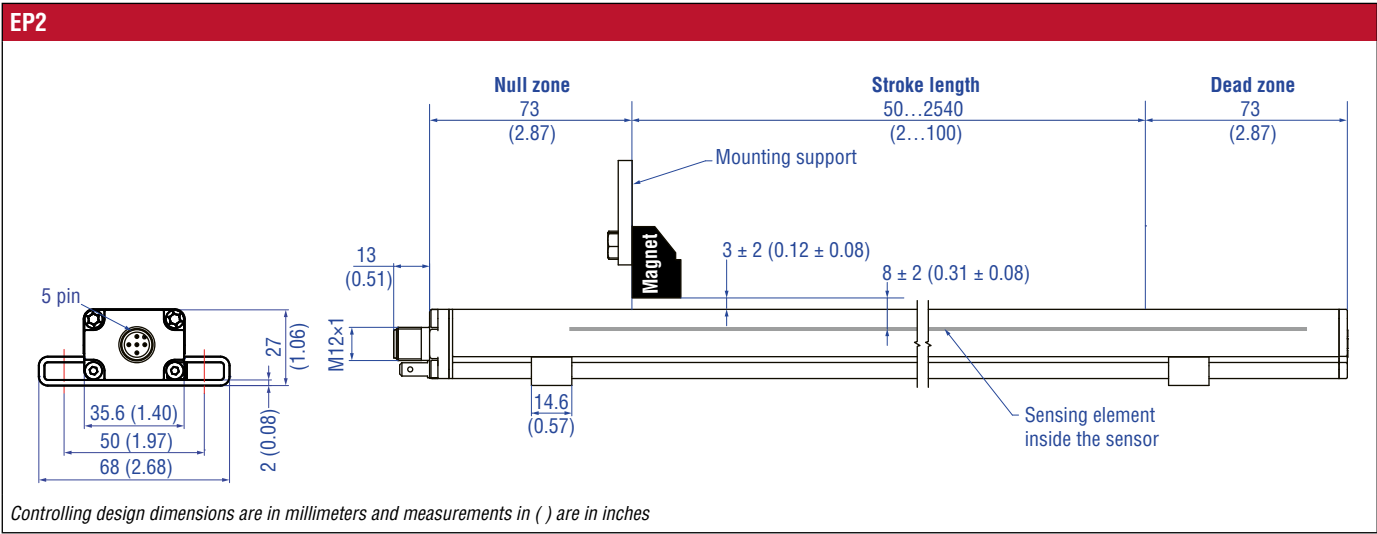


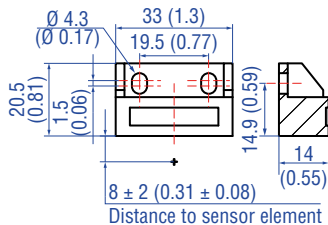


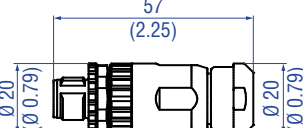



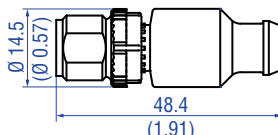
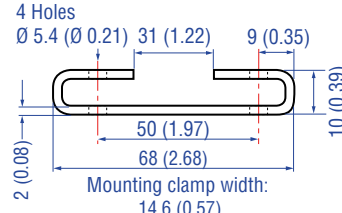
Fig. 3: E-Series EP2 with block magnet

CONNECTOR WIRING

D34		
Signal + power supply		
M12 male connector (A-coded)	Pin	Function
<p>View on sensor</p>	1	Shield
	2	+24 VDC (–15/+20 %)
	3	DC Ground (0 V)
	4	CAN_H
	5	CAN_L

Fig. 4: Connector wiring D34 (M12 connector)

FREQUENTLY ORDERED ACCESSORIES – Additional options available in our [Accessories Guide](#) 551444

Position magnet		Cable connectors*	
			
Block magnet L Part no. 403 448	M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677	M12 A-coded female connector (5 pin), angled Part no. 370 678	M12 A-coded male connector (5 pin), straight Part no. 561 665
Material: Plastic carrier with hard ferrite magnet Weight: Approx. 20 g Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F) This magnet may influence the sensor performance specifications for some applications.	Material: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 4...8 mm (0.16...0.31 in.) Wire: 1.5 mm ² Operating temperature: -30...+85 °C (-22...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	Material: GD-Zn, Ni Termination: Screw; max. 0.75 mm ² Contact insert: CuZn Cable Ø: 5...8 mm (0.2...0.31 in.) Wire: 0.75 mm ² (18 AWG) Operating temperature: -25...+85 °C (-13...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.4 Nm	Housing: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 4...8 mm (0.16...0.31 in.) Wire: 1.5 mm ² Operating temperature: -30...+85 °C (-22...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm
Cord sets		Connection accessories	
			
Cable with M12 A-coded female connector (5 pin), straight – pigtail Part no. 370 673	Cable with M12 A-coded female connector (5 pin), angled – pigtail Part no. 370 675	M12 A-coded T connector (5 pin) Part no. 370 691	Passive M12 A-coded male bus terminator (5 pin) Part no. 370 700
Material: PUR jacket; black Features: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	Material: PUR jacket Features: Shielded Cable length: 5 m (16.4 ft) Ingress protection: IP67 (correctly fitted) Operating temperature: -25...+80 °C (-13...+176 °F)	Selfcuring coupling nut 2 × female connector 1 × male connector Feature: Shielded Ingress protection: IP67 (correctly fitted)	Material: PUR Termination: Screw Contact insert: Au Operating temperature: -25...+85 °C (-13...+121 °F) Ingress protection: IP68 (correctly fitted)
Mounting clamp			
			
Mounting clamp Part no. 403 508			
Material: Stainless steel 1.4301/1.4305 (AISI 304/303)			

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
E	P	2						D	3	4	1	C						1			
a			c					d			e	f							g		
																			optional		

a	Sensor model
E P 2	Smooth profile

b	Stroke length
X X X X M	0050...2540 mm
Standard stroke length (mm)	
50... 500 mm	25 mm
500... 2540 mm	50 mm
X X X X U	001.0...128.0 in.
Standard stroke length (in.)	
2... 20 in.	1.0 in.
20... 100 in.	2.0 in.
Non-standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments.	

c	Connection type
D 3 4	M12 (5 pin) male connector

d	Operating voltage
1	+24 VDC (-15/+20 %)

f	Output
C (14) (15) (16) (17) (18) (19) = CANopen	
Protocol (box no. 14, 15, 16)	
C 3 0 4	CANopen
C 4 0 4	CANopen (bus terminator)
Baud rate (box no. 17)	
1	1000 kBit/s
2	500 kBit/s
3	250 kBit/s
4	125 kBit/s
Resolution (box no. 18)	
4	10 µm
5	20 µm
Performance (box no. 19)	
1	Standard
Optional	
g	Magnet number for multi-position measurement
Z 0 2	2 magnets

DELIVERY



- Sensor
- 2 mounting clamps up to 1250 mm (50 in.) stroke length + 1 mounting clamp for each 500 mm (20 in.) additional stroke length

Accessories have to be ordered separately.

Manuals, Software & 3D Models available at:
www.temposonics.com



Temposonics

AN AMPHENOL COMPANY

UNITED STATES
Temposonics, LLC
Americas & APAC Region
3001 Sheldon Drive
Cary, N.C. 27513
Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY
Temposonics
GmbH & Co. KG
EMEA Region & India
Auf dem Schüffel 9
58513 Lüdenscheid
Phone: +49 2351 9587-0
E-mail: info.de@temposonics.com

ITALY
Branch Office
Phone: +39 030 988 3819
E-mail: info.it@temposonics.com

FRANCE
Branch Office
Phone: +33 6 14 060 728
E-mail: info.fr@temposonics.com

UK
Branch Office
Phone: +44 79 44 15 03 00
E-mail: info.uk@temposonics.com

SCANDINAVIA
Branch Office
Phone: +46 70 29 91 281
E-mail: info.sca@temposonics.com

CHINA
Branch Office
Phone: +86 21 2415 1000 / 2415 1001
E-mail: info.cn@temposonics.com

JAPAN
Branch Office
Phone: +81 3 6416 1063
E-mail: info.jp@temposonics.com

Document Part Number:
551339 Revision C (EN) 10/2021



temposonics.com

© 2021 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at www.temposonics.com/trademarkownership.