

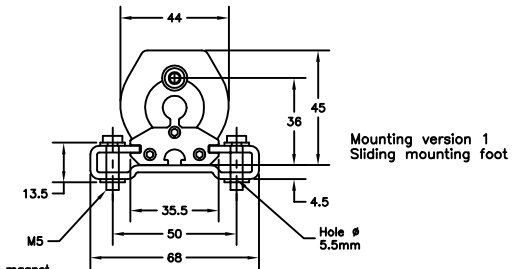
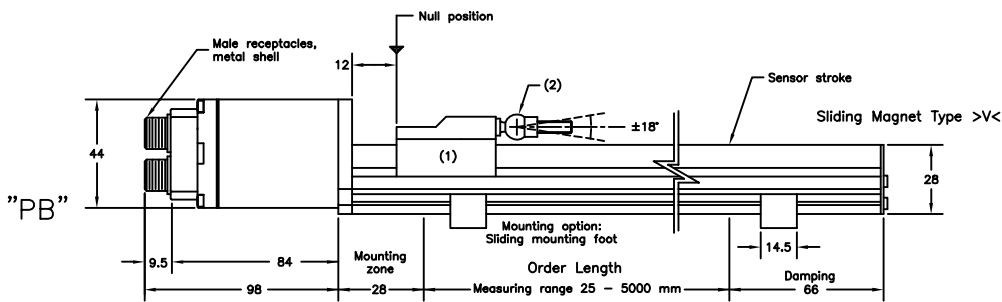
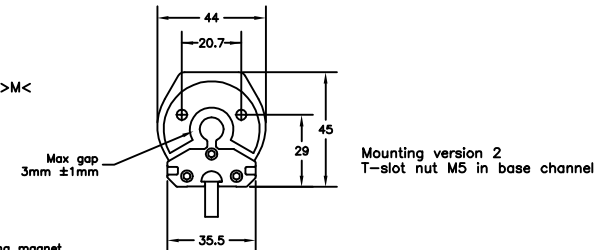



- (1) Captive sliding magnet
- (2) Ball jointed arm, M5 thread

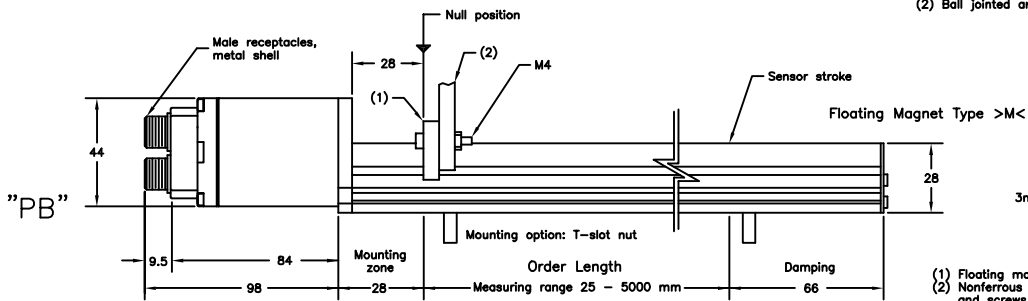

- (1) Captive sliding magnet
- (2) Ball jointed arm, M5 thread



- (1) Floating magnet
- (2) Nonferrous support and screws

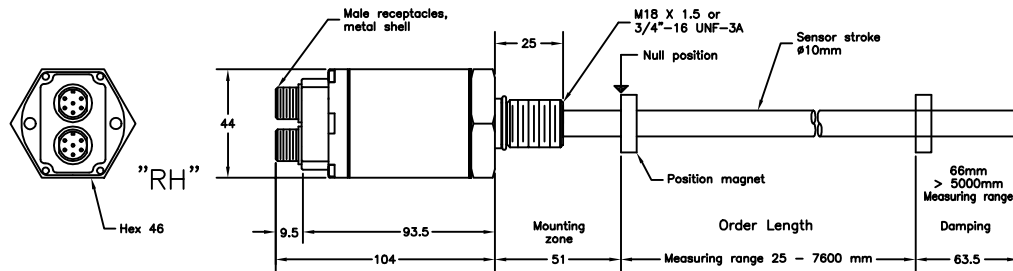

B	8/26/99	KLP	3879	ADD DIMENSION FOR THE SENSING ELEMENT
A	8/17/99	KLP	3862	RELEASE TO PRODUCTION
REV.	DATE	BY	ECO #	DESCRIPTION
UNLESS OTHERWISE SPECIFIED:				MATERIAL: NA
DIM = ± .01				FINISH: NA
SURF. = ± .005				DRY: KLP
ANGULAR = ± 1°				DATE: 8/17/99
REMOVE BURRS AND SHARP EDGES .015 MAX				DOCUMENT OWNER: KLP
DIM LINES HELD AFTER PLATING OR CONVERSION COATING				PRODUCT LINE: RH - PB
DRILL DEPTHS ARE TO FULL DIAMETER				SCALE/DRAWING SIZE: 1:1 D
TAP DEPTHS ARE MINIMUM FULL THREADS				SHEET 1 OF 1
DO NOT SCALE DRAWING				SVG NO: 901026
				REV B

VITE
SYSTEMS CORPORATION
SENSORS DIVISION
 RESEARCH TRIANGLE PARK, NORTH CAROLINA 27709
 TITLE: RH/PB CANBUS